
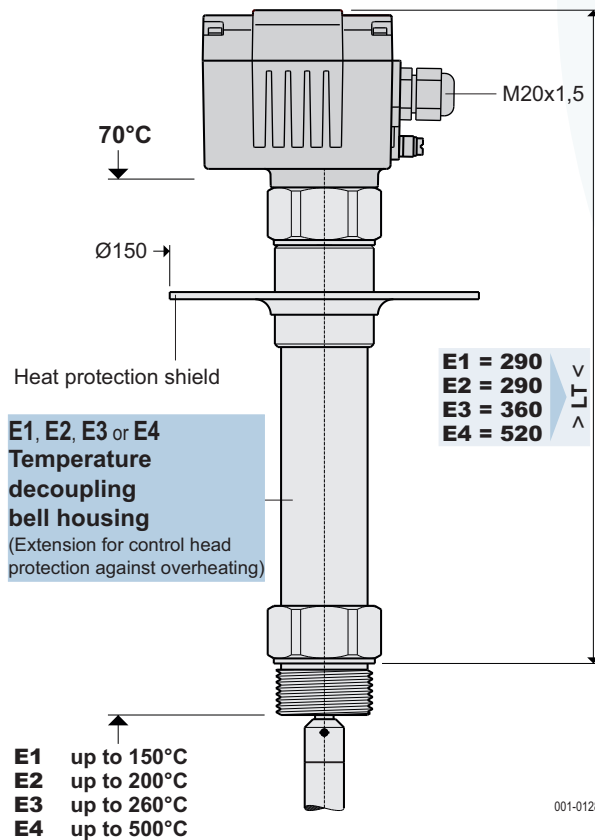
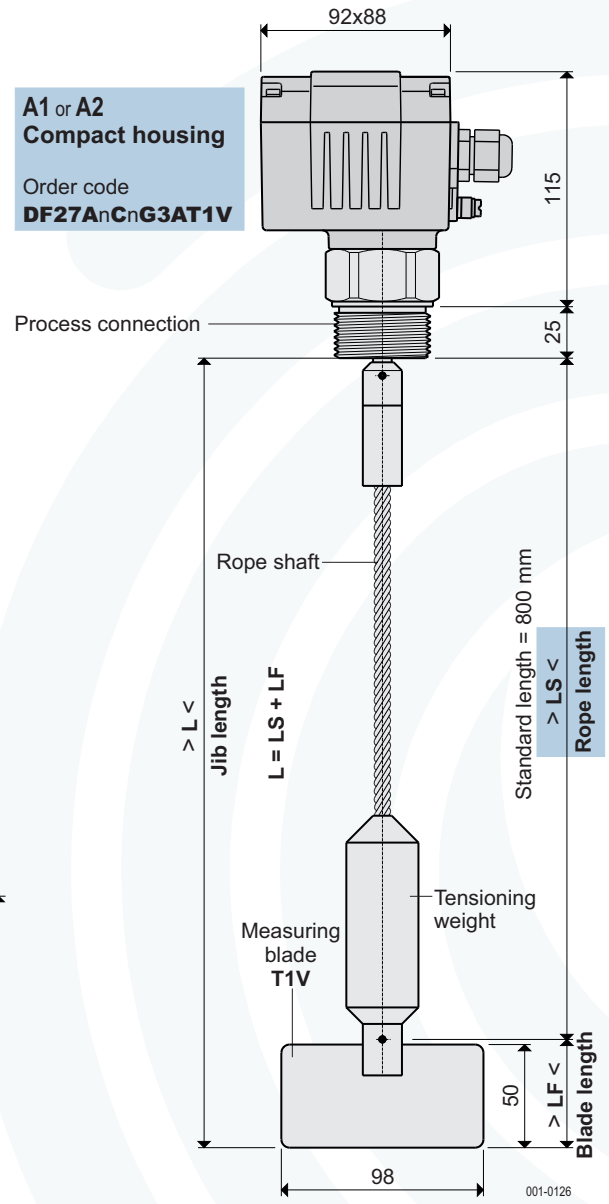


Full, empty and demand indicator for vertical mounting with rope shaft

Signal contact 2 A / 250V AC potential-free
 Type of protection IP66 in accordance with DIN EN 60529
 Maintenance none

4

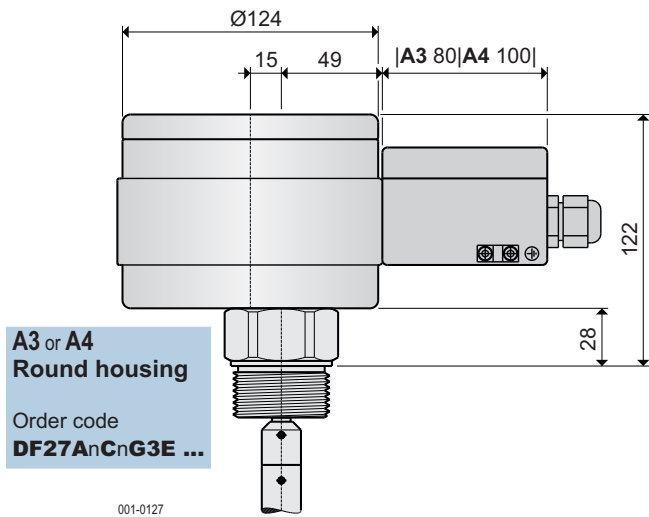

You will find further technical details under appliance information DF-GI-..

